




LKFS MULTI-WATT AND MULTI-CCT

Dimensional Drawing

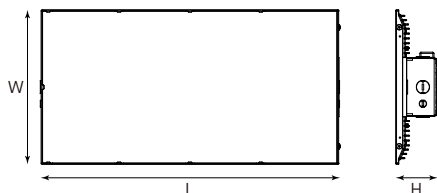

Model #	L (in)	W (in)	H (in)	Weight (lbs)
AL-BE-HB-18L-FHBSR	13.00	9.50	2.20	3.7
AL-BE-HB-24L-FHBSR	14.20	10.25	2.40	4.5
AL-BE-HB-36L-FHBSR	19.70	10.25	2.60	6.5
AL-BE-HB-60L-FHBSR	30.70	11.00	2.60	9.25

Specifications

Model Name	AL-BE-HB-18L-FHBSR-U	AL-BE-HB-24L-FHBSR-U	AL-BE-HB-36L-FHBSR-U	AL-BE-HB-60L-FHBSR-U
Input Wattage (W)	130 / 105 / 82	161 / 117 / 98	242 / 196 / 154	397 / 309 / 228
Voltage (V)	U (120-277V) / HV (227-480V)			
Lumen Output (lm)	18,000 / 15,000 / 12,000	24,000 / 18,000 / 15,000	36,000 / 30,000 / 24,000	60,000 / 48,000 / 36,000
Efficacy (lm/W)	135 / 142 / 148	145 / 152 / 157	143 / 149 / 156	148 / 154 / 160
Color Rend. Index	70+ CRI			
Color Temperature	40 (4,000K) - 50 (5,000K)			
Dimmable	Yes			
Longevity (L70)	135,000 Hours			
Amb. Temperature	-40°C to 50°C / -40°F to 122°F			
Warranty	5 years			

Ordering Guide

EG: AL-BE-HB-18L-FHBSR-U

Model Name	LM	CRI	CCT	Driver
AL-BE-HB-XXL-FHBSR	18L: 18000lm 24L: 24000lm 36L: 36000lm 60L: 60000lm	8: >80	40: 4000k 50: 5000k	U: Universal 120-277V HV: 347-480V

Designed to illuminate a wide variety of settings, including commercial, industrial & retail settings such as warehouses, manufacturing plants, sporting venues and big-box retailers.

FEATURES

- Rated for over 135,000 hours
- Universal 120-277 V AC or 347-480 V AC Voltage Input
- Dimming Driver Standard
- >80 Color Rendering Index (CRI)
- Powder coated steel housing
- Easy installation in new construction or retrofit
- 5-year warranty
- Chain mounting with V-hooks standard