


ES5U



Dimensional Drawing

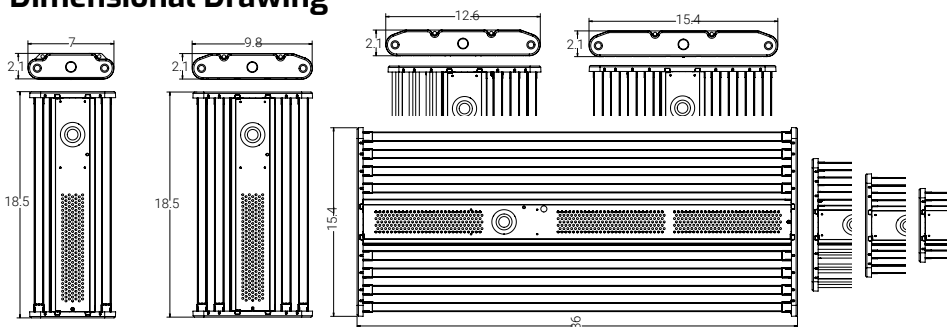

Specifications

Model Name AL- E55U	13K-6MS	21K-8MS	32K-6M	37K-8M	46K-8M	54K-8M
Input Wattage (W)	68W	111W	168W	186W	235W	289W
Voltage (V)	U (120-277V) / HV (480V)					
Lumen Output (lm)	12,971 lm	21,487 lm	32,230 lm	37,342 lm	45,890 lm	53,942 lm
Efficacy (lm/W)	190 lm/W	194 lm/W	192 lm/W	200 lm/W	195 lm/W	187 lm/W
Color Rendering Index	80+ CRI					
Color Temperature	40 (4000K) / 50 (5000K)					
Dimming Compatible	Yes					
Longevity (L70)	122,000 Hours					
Certif. /Listings	ETL, UL, RoHS, DLC, AMI, CFR, ICES, CSA.					

Ordering Guide

EG: AL-E55U-13K-6MS-80-40-U-CL

Model Name	Lumen Output	CRI	CCT	Driver	Lens
AL-E55U	13K-6MS: 12,971 lm	7: >70	40: 4000k	U: Universal 120-277V	CL: Clear Lens
	21K-8MS: 21,487 lm	8: >80std	50: 5000k	HV: 480V	FR: Frosted Lens
	32K-6M: 32,230 lm	9: >90			AL: Aisle Lens
	37K-8M: 37,342 lm				NW: Narrow Lens
	46K-8M: 45,890 lm				CC: Conformal coating (no lens)
	54K-8M: 53,942 lm				

KEY FEATURES

- 6,000 to 90,000 lumens
- Up to 214 LPW
- Up to 65°C ambient
- New smaller design
- Aluminum construction (heatsinks and wireway)
- Dust-proof and wet location options
- Dimmable 0-10V (standard)
- IoT Ready, UltraLink compatible
- 6KV surge protection (10KV & 20KV optional)


ULTRALINK
 Controls ReIMAGINED

Abaco Lighting, Inc.

 2411 NW 16th Ln. #5 | Pompano Beach, FL 33064
 Office: 877-377-4123 www.abacolighting.com