




Custom Dimensional Drawing

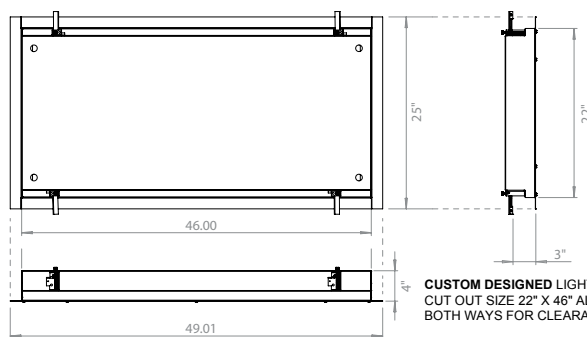

Specifications

Model Name	AL-AEL-ABASP-2x4-65-	AL-AEL-ABASP-2x4-79-	AL-AEL-ABASP-2x4-94-	AL-AEL-ABASP-2x4-173-
Power Consumption	65 watt	79 watt	94 watt	173 watt
Input Voltage	U (120-277V)			
Lumen Output	9,000 Lm	11,000 Lm	13,000 Lm	25,000 Lm
Efficacy	155 Lm/W	155 Lm/W	140 Lm/W	140 Lm/Wv
Color Rendering	>82 CRI			
Color Temperature	30 (3,000k) - 35 (3,500k) - 40 (4,000k) - 50 (5,000k)			
Dimming Compatible	0-10V			
Life Time Rating	100,000 hrs @ L70			
Ambient Temperature	-22° F to 122° F			

Ordering Guide

EG: AL-AEL-ABASP-**2X4-173-50**-U

Model Name	Conf.	Wattage	CRI	CCT	Driver
AL-AEL-ABASP-	2x4	65: 65 W	8: >80	30: 3000k	U: Universal 120-277V
	2x4	79: 79 W		35: 3500k	
	2x4	94: 94 W		40: 4000k	
	2x4	173: 173 W		50: 5000k	

DESCRIPTION

Custom made wet Location, 2'X4' troffer, 195w, 25,000 Lumens, 5000K, 100,000 hours of life time rated L70, UL and CSA approved, recessed grid mounting, food grade approved, IP65, ISO 5 certified, 5 year warranty.

APPLICATIONS

- **DOORFRAME:** Inset door frame constructed of .063" aluminum.
- **ELECTRICAL SYSTEM:** Complies with federal energy efficiency standards.
- **OPTICAL SYSTEM:** A variety of lensing options are available to fit the needs of any application.
- **LISTINGS:** Approved to CSA and UL standards. Food Safe, NSF Listed. IP65 rating. ISO 5 certified.
- **HOUSING:** Available in 20 gauge cold roll steel or .063" aluminum.
- **WARRANTY:** 5-Year Limited Warranty