


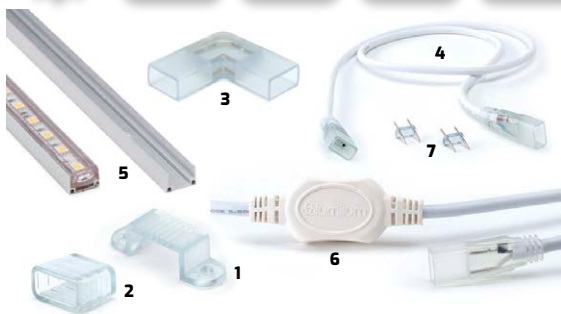

Product Accessories

1 Model Name	AL-RO-RL-MC-HLO
Item Name	Mounting Bracket
2 Model Name	AL-RO-RL-EC-HLO
Item Name	End Caps (Set of 2)
3 Model Name	AL-RO-RL-LC-HLO
Item Name	L Connector (LUM-120 505AC 90°)
4 Model Name	AL-RO-RL-IC6-HLO
Item Name	Inter-Connector Cable 6" 12" 20" 40"
5 Model Name	AL-RO-RL-AUC-4-HLO
Item Name	Aluminum U Channel 4ft
6 Model Name	AL-RO-RL-PC-HLO
Item Name	Power Plug with Rectifier
7 Model Name	AL-RO-RL-CP-HLO
Item Name	Connecting Pin

Specifications

Model Name	AL-RO-RL
Length	164ft spool (50 meters)
Input Wattage (W)	6W per foot
Voltage (V)	120V
Lumen Output (lm)	700 lm/ft
Efficacy (lm/W)	116 lm/W
Color Rendering Index	90+ CRI
Color Temperature	2200K 2700K 3000K 4000K 5500K
Dimming Compatible	Yes
Longevity (L70)	50,000 hours
Certifications/Listings	CSA, IP65, DLC

Ordering Guide

EG: AL-RO-RL-9-55

Model Name	CRI	CCT
AL-RO-RL	9: >90	22: 2200k 27: 2700k 30: 3000k 40: 4000k 55: 5500k

DESCRIPTION

This Line Voltage (120V) LED Strip Light requires no power adapters or drivers, instead it uses a rectifier that converts AC into DC Current. The light source in the LED strip consists of 3,300 equally distributed high brightness SMD 5050 chips per 164ft. spool which come in incremental segments of 12 inches (1ft). The light output is bright and crisp with a (Color Rendering Index) CRI > 90.

FEATURES

- 164ft spool (50 meters)
- Input: 120 Volts
- Dimmable
- CRI > 90
- 4.0 Watts/ft
- 50,000+ Hours Rated Life
- Outdoor / Indoor rated