

PRODUCT ACCESSORIES

Linking Butt Connector:

AL-LI-LINK-BC

Power cords:

36" cord: AL-LI-LINK-PC-36

48" cord: AL-LI-LINK-PC-48

96" cord: AL-LI-LINK-PC-96

Linking power cord:

4" link: AL-LI-LINK-LPC-4

6" link: AL-LI-LINK-LPC-6

8" link: AL-LI-LINK-LPC-8

12" link: AL-LI-LINK-LPC-12

18" link: AL-LI-LINK-LPC-18


24" link: AL-LI-LINK-LPC-24

36" link: AL-LI-LINK-LPC-36

48" link: AL-LI-LINK-LPC-48



Dimensional Drawing

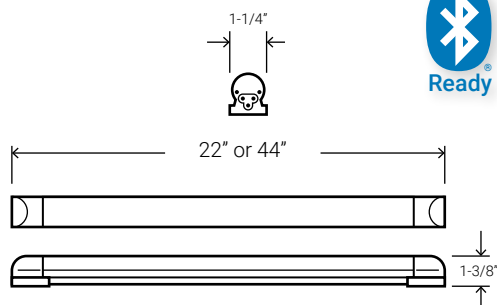

Specifications

Model Name	AL-LI-LINK-11-20-8-50-U	AL-LI-LINK-22-44-8-50-U	AL-LI-LINK-44-92-8-50-U
Input Wattage (W)	11W	22W	2x22W
Voltage (V)	U (120-277V)		
Lumen Output (lm)	1,609 Lm	3,542 Lm	7,084 Lm
Efficacy (lm/W)	149 Lm/w	149 Lm/w	161 Lm/w
Color Rendering Index	80+ CRI		
Color Temperature	50 (5000K)		
Warranty	7 year		
Dimensions	2 Feet	4 Feet	8 Feet
Linking	Up to 40 Rapid Link Bars can be linked using a single electrical connection		
Certifications/Listings	UL, DLC, RoHS, NSF		
Operating Temperature	-35C up to 50C		

Quality Construction

Extruded aluminum construction improves thermal transfer, keeping LEDs cool to increase performance and life.

Simple, Rapid Installation. System of bars, cords and mounting clips designed to save time and money. Link up to 40 bars with a single electrical connection.

Controls and Sensors for use with on / off sensors and relays only. Multiple options available.

FEATURES

- 1,600 to 3,200 lumens
- Up to 161 LPW
- Link up to 40 bars
- 180° light distribution
- Easy maintenance
- Custom lengths from 1' to 8' (2'-4' standard)
- 7 YEAR WARRANTY

Ordering Guide

EG: AL-LI-LINK-11-20-8-50-U

Model Name	Wattage	Dimensions	CRI	CCT
AL-LI-LINK	11: 11 Watts	20: 20"	8: >80	50: 5000k
	22: 22 Watts	44: 44"		
	44: 44 Watts	92: 92"		