







Dimensional Drawing


LKFS

LKFS MULTI-WATT AND MULTI-CCT

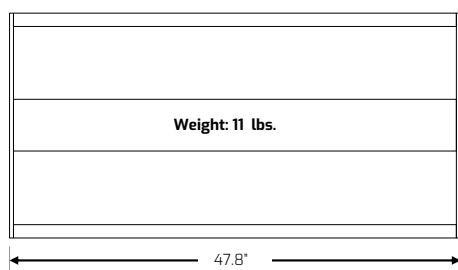

Specifications

Model Name	AL-BE-CB22-4L-LKFS-U	AL-BE-CB24-6L-LKFS-U
Input Wattage (W)	22W / 27W / 32W	33W / 37W / 44W
Voltage (V)	120-277V	120-277V
Lumen Output (lm)	3,120 lm / 3,649 lm / 4,196 lm	4,460 lm / 5,002 lm / 5,675 lm
Efficacy (lm/W)	139 lm/W - 134 lm/W - 131 lm/W	134 lm/W - 134 lm/W - 129 lm/W
Color Rendering Index	82+ CRI	82+ CRI
Selectable Color Temp.	35 (3500K) / 40 (4000K) / 50 (5000K)	35 (3500K) / 40 (4000K) / 50 (5000K)
Dimming Compatible	Yes	Yes
Longevity (L70)	196,000 hours	196,000 hours
Certifications/Listings	cULus, DLC, FCC	cULus, DLC, FCC

High quality powder coated reflector creates an elegant design for grid ceiling.

Dimmable to 10%. Field selectable wattage and color temp.

FEATURES

- Field selectable 3500k (warm/neutral white), 4000k (neutral white) & 5000k (cool white) color temperatures.
- Long -life LEDs provide at least 196,000 hours of operation with at least 70% of initial lumen output (L70).
- Provides a range of 4,500 to 5,800 nominal lumens.
- Uniform illumination with no visible LED pixilation.
- Steel housing and PMMA lens.

Ordering Guide

EG: AL-BE-CB22-4L-LKFS-U

Model Name	Lumen	CCT	Driver
AL-BE-CB22	4L: 4,000lm	LKFS	U: Universal 120-277V
AL-BE-CB24	6L: 6,000lm		


Abaco Lighting, Inc.

 2411 NW 16th Ln. #5 | Pompano Beach, FL 33064
 Office: 877-377-4123 www.abacolighting.com