



SALIDA FACEPLATES ALSO AVAILABLE.

## Dimensional Drawing



## Housing

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black finish

## Mounting

- Universal surface mount, wall or ceiling, with EZ-snap thermoplastic mounting canopy, which snaps into place making installation quick & easy

## Options

- **SDT:** Self-Diagnostic (option SDT) continually diagnoses unit's performance and tests system (auto battery discharge once every 30 days and once every 12 months) to ensure reliable operation and to meet electrical and life safety codes.
- **DC:** Dual Circuit option on the AC-only unit enables it to be connected to two different (primary and secondary, one acting as a back-up for the other) supplies at the same time (contact customer service for more information).



SPECIAL WORDING SIGN SAMPLES

## FEATURES

- Compact, low-profile design in neutral finish
- Energy efficient LED technology
- EZ snap-out chevron directional indicators
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

## ILLUMINATION

- Ultra-bright, energy efficient, long-life Red or Green LED

## ELECTRICAL

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch
- LVD (low voltage disconnect) prevents battery from deep discharge
- Long-life, maintenance-free, rechargeable Ni-Cad battery (EM model)
- Internal solid-state transfer switch automatically connects the internal battery to LED Board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## EG: Abaco Part #

|                               |               |
|-------------------------------|---------------|
| Red Letters   White Housing   | AL-EZXTEU2-RW |
| Red Letters   Black Housing   | AL-EZXTEU2-RB |
| Green Letters   White Housing | AL-EZXTEU2-GW |
| Green Letters   Black Housing | AL-EZXTEU2-GB |

## Ordering Guide

| Model Name | Face #                      | Letter Color       | Housing Color        | Battery                             | Options                                                          |
|------------|-----------------------------|--------------------|----------------------|-------------------------------------|------------------------------------------------------------------|
| AL-EZXTE   | U2: Universal Single/Double | R: Red<br>G: Green | W: White<br>B: Black | Blank: AC Only<br>EM: NiCad Battery | SDT: Self Diagnostics<br>2C: Dual Circuit<br>SW: Special Wording |



KXTEUIRWV



KXTEUIGBB



KXTEUIRBA



## Dimensional Drawing

### Housing


- Premium-grade, extruded aluminum housing (also available in black or white powder coated)
- Easily removable chevron directional indicators
- Unique design allows double face conversion in the field
- Quick-snap face plate closure

### Mounting

- Die cast mounting canopy included (provides top, end or back mount convenience)
- Universal wall mounting K/O pattern

### Options

- **SDT:** Self-Diagnostic (option SDT) continually diagnoses unit's performance and tests system (auto battery discharge once every 30 days and once every 12 months) to ensure reliable operation and to meet electrical and life safety codes.
- **2C:** Dual Circuit option on the AC-only unit enables it to be connected to two different (primary and secondary, one acting as a back-up for the other) supplies at the same time (contact customer service for more information).
- **TP:** Screws in corners seal the unit, preventing access to unauthorized personnel.
- **Die-Cast EXIT** panels available to order separately (contact customer service)

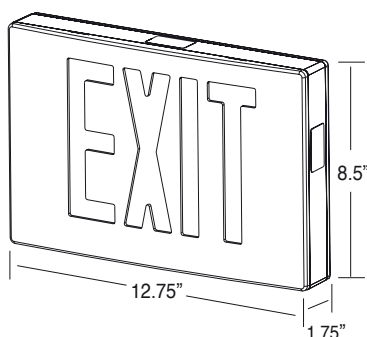

### Illumination

- Ultra-bright, energy efficient, long-lasting Red or Green LED

LED cast Aluminum series utilizes an unique illumination design in an architecturally pleasing housing. Surface mount edge-lit LED exits offer spec grade look with in-field installation flexibility.

### FEATURES

- Energy efficient LED technology
- Spec-grade curved faceplate
- UL listed for damp locations & meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

### ELECTRICAL

- Dual 120V/277V voltage
- Charge rate/power "ON" LED indicator light and push-to-test switch
- LVD (low voltage disconnect) prevents battery from deep discharge
- Maintenance-free, rechargeable Ni-Cad battery (EM model)
- Internal solid-state transfer switch automatically connects the internal battery to LED Board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### EG: Abaco Part #

Red Letters | Black Housing | Aluminum Face AL-KXTE1-RBA

Red Letters | Black Housing | Aluminum Face AL-KXTE2-RBA

Green Letters | Black Housing | Aluminum Face AL-KXTE1-GBA

Green Letters | Black Housing | Aluminum Face AL-KXTE2-GBA

## Ordering Guide

| Model Name | Face #         | Letter Color | Housing Color          | Face Color             | Battery           | Options                 |
|------------|----------------|--------------|------------------------|------------------------|-------------------|-------------------------|
| AL-KXTE    | 1: Single Face | R: Red       | A: Brushed Aluminum    | A: Brushed Aluminum    | Blank: AC Only    | SDT: Self Diagnostics   |
|            | 2: Double Face | G: Green     | B: Black Powder Coated | B: Black Powder Coated | EM: NiCad Battery | 2C: Dual Circuit        |
|            | 3: Universal   |              | W: White Powder Coated | W: White Powder Coated |                   | FP: Face Plate          |
|            | Single/Double  |              |                        |                        |                   | TP: Tamper Proof Screws |