




Dimensional Drawing

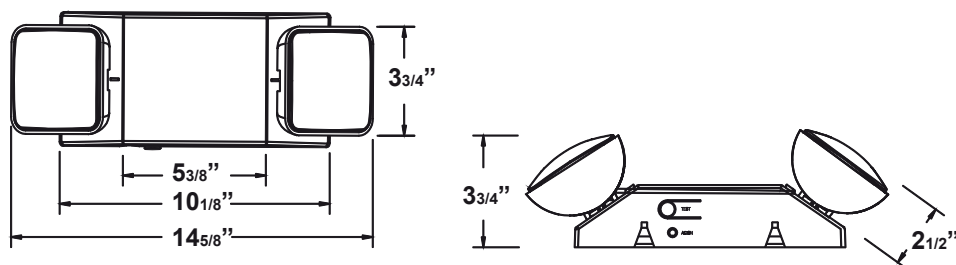

Housing

- Injection-molded, engineering-grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

Mounting

- Surface mount via quick-connect back plate; fits most standard size junction boxes and snaps into place to make internal electrical connections.
- Conduit mount knockout on top of housing and back plate.
- Suitable for wall or ceiling mount.

Options

- **SDT:** Self-diagnostic test feature continually diagnoses unit's performance and tests system to ensure reliable operation and to meet electrical and life safety codes.
- **HL:** 12-LED heads provide increased center-to-center spacing.

Adding an **Abaco Lighting** approved motion sensor system to your lighting upgrade project will further enhance energy savings and create an even faster payback. Specifications are subject to change with or without notice.

Decorative and economical unit with easy install back plate feature. Has modern look appearance and low maintenance with energy efficient LED heads.

ILLUMINATION

- Long lasting, efficient ultra-bright white LED lamp heads
- High-performance chrome-plated metalized reflector and plastic lens for optimal light distribution
- Adjustable LED lamp heads provide optimal center-to-center spacing
- High-lumen option available for increased center-to-center spacing

ELECTRICAL

- Dual 120/277 voltage
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing
- Long-life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

Ordering Guide

EG: AL-R1-LED-W-SDT

Model Name	Housing Color	Options
AL-R1-LED	W: White B: Black	SDT: Self-Diagnostics HL: High-Lumen



Abaco Lighting, Inc.

2411 NW 16th Ln, #5 | Pompano Beach, FL 33064
 Office: 877-377-4123 | Fax: 754-210-2144