




### Dimensional Drawing

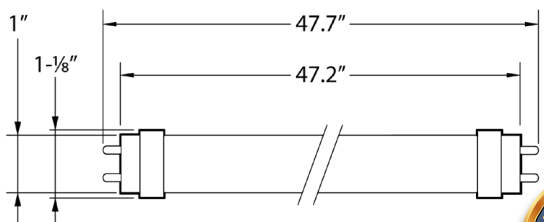


### Specifications


| Model Name              | L32T8-14-8-50-BC-A   |
|-------------------------|----------------------|
| Input Wattage (W)       | 27W                  |
| Voltage (V)             | 120-277V             |
| Lumen Output (lm)       | 3,800 lm             |
| Efficacy (lm/W)         | 140 lm/W             |
| Color Rendering Index   | 80+ CRI              |
| Color Temperature       | 50 (5000K)           |
| Dimming Compatible      | No                   |
| Replacement Wattage     | 4' Linear T5HO bulbs |
| Longevity (L70)         | 50,000 hours         |
| Certifications/Listings | UL, DLC              |

### EASY INSTALLATION


Ensure T5HO / T8 sockets are in good condition prior to installing T5HO / T8 LED lamps

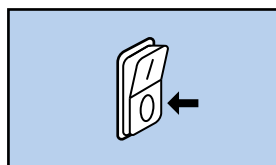


1. TURN POWER OFF

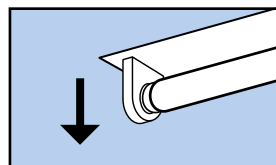

2. REMOVE FLUORESCENT LAMP

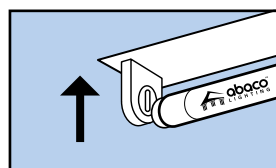

3. INSTALL LED LAMP

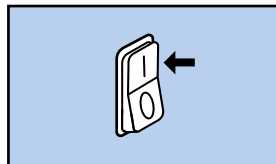

4. TURN POWER BACK ON

### FEATURES

Ideal tubes for replacing any current T5HO for use with existing ballast. Abaco Lighting™ **SAF-T-LED™** use thermal break technology which prevents tubes from overheating. Patented "Thermal Break Technology" ensures safer installation and eliminates potential fire hazard.

### FEATURES

- Exclusive thermal break technology prevents tubes from overheating.
- T8 saves up to \$108 in electricity over life.
- Ideal for food grade applications. No glass. No mercury. ROHS compliant.
- High lumenefficiency and excellent color rendition.
- Replaces existing fluorescent lamps without removing ballast rewiring.
- Suitable for damp locations.
- Occupancy sensors friendly.



### Ordering Guide

EG: L54T5HO-27-8-50-BC-A

| Model Name | Wattage      | CRI    | CCT                    | Type / housing                               |
|------------|--------------|--------|------------------------|----------------------------------------------|
| L54T5HO-   | 27: 27 Watts | 8: >80 | 40: 4000k<br>50: 5000k | BC: Ballast Compatible<br>A: Acrylic Housing |




**Abaco Lighting, Inc.**

2411 NW 16th Ln. #5 | Pompano Beach, FL 33064  
Office: 877-377-4123 [www.abacolighting.com](http://www.abacolighting.com)



### Dimensional Drawing

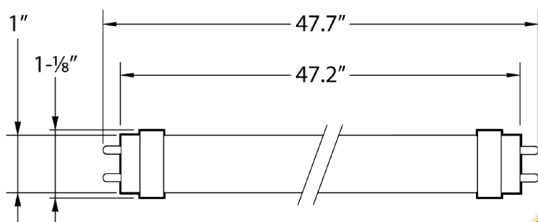


### Specifications


| Model Name              | L32T8-14-8-50-BC-A      |
|-------------------------|-------------------------|
| Input Wattage (W)       | 14W                     |
| Voltage (V)             | 120-277V                |
| Lumen Output (lm)       | 2,100 lm                |
| Efficacy (lm/W)         | 150 lm/W                |
| Color Rendering Index   | 80+ CRI                 |
| Color Temperature       | 40 (4000K) / 50 (5000K) |
| Dimming Compatible      | No                      |
| Replacement Wattage     | 4' Linear T8 bulbs      |
| Longevity (L70)         | 50,000 hours            |
| Certifications/Listings | UL, DLC                 |

### EASY INSTALLATION


Ensure T5HO / T8 sockets are in good condition prior to installing T5HO / T8 LED lamps

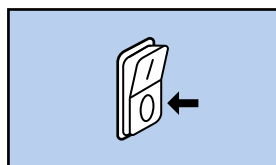


1. TURN POWER OFF

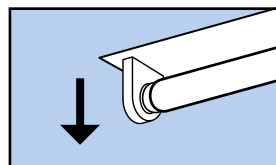

2. REMOVE FLUORESCENT LAMP

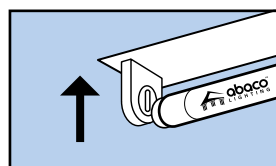

3. INSTALL LED LAMP

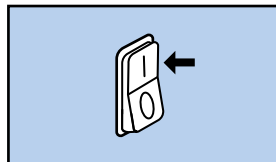

4. TURN POWER BACK ON

### FEATURES

Ideal tubes for replacing any current T8 for use with existing ballast. Abaco Lighting<sup>TM</sup> SAF-T-LED<sup>TM</sup> use thermal break technology which prevents tubes from overheating. Patented "Thermal Break Technology" ensures safer installation and eliminates potential fire hazard.

### FEATURES

- Exclusive thermal break technology prevents tubes from overheating.
- T8 saves up to \$108 in electricity over life.
- Ideal for food grade applications. No glass. No mercury. ROHS compliant.
- High lumenefficiency and excellent color rendition.
- Replaces existing fluorescent lamps without removing ballast rewiring.
- Suitable for damp locations.
- Occupancy sensors friendly.



### Ordering Guide

EG: L32T8-14-8-50-BC-A

| Model Name | Wattage      | CRI    | CCT                    | Type / housing                               |
|------------|--------------|--------|------------------------|----------------------------------------------|
| L32T8-     | 14: 14 Watts | 8: >80 | 40: 4000k<br>50: 5000k | BC: Ballast Compatible<br>A: Acrylic Housing |



**Abaco Lighting, Inc.**

2411 NW 16th Ln. #5 | Pompano Beach, FL 33064  
 Office: 877-377-4123 www.abacolighting.com