



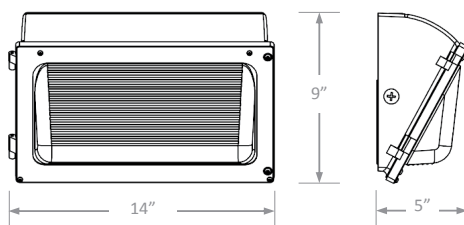

LKFS MULTI-WATT AND MULTI-CCT

Dimensional Drawing



Specifications

Model Name	AL-BE-WPE-3L-LKFS-U	AL-BE-WP2-7L-LKFS-U	AL-BE-WP2-10L-LKFS-U	AL-BE-WP2-15L-LKFS-U
Input Wattage (W)	15W / 19W / 24W	30W / 39W / 51W	43W / 59W / 76W	71W / 93W / 115W
Voltage (V)	U (120-277V)			
Lumen Output (lm)	2,105 lm / 2,711 lm / 3,325 lm	4,481 lm / 5,618 lm / 6,907 lm	6,380 lm / 8,260 lm / 10,049 lm	10,260 lm / 12,703 lm / 14,843 lm
Efficacy (lm/W)	143 - 140 - 137	150 - 143 - 135	147 - 140 - 133	143 - 137 - 129
Color Rend. Index	80+ CRI			
Color Temperature	35 (3500K) / 40 (4000K) / 50 (5000K)			
Dimmable	No			
Longevity (L70)	156,000 Hours			
Certifications/ Listings	cULus, IP65, DLC, FCC, 4KV			
Warranty	5 years			

Ordering Guide

EG: AL-BE-WP2-15L-LKFS-U

Model Name	LM	CRI	CCT	Driver
AL-BE-WPE	3L: 3000lm	8: >80	LKFS	U: Universal 120-277V
AL-BE-WP2	7L: 7000lm			
AL-BE-WP2	10L: 10000lm			
AL-BE-WP2	15L: 15000lm			

Great Light distribution for outdoor safety and visibility. Super long life for reduced maintenance. UV stabilized polycarbonate lens.

FEATURES

- Field selectable 3500k (warm/neutral white), 4000k (neutral white) & 5000k (cool white) color temperatures.
- Long -life LEDs provide at least 156,000 hours of operation with at least 70% of initial lumen output (L70).
- 5-year warranty year of all electronics and housing.
- Cast aluminum housing with dark bronze, powder coat finish.